



Direct Driven Centrifugal Fan KDD Series

- *DIDW forward curved direct driven type.*
- *High efficiency*
- *Low Noise*
- *Temperature -20 °C to +40 °C*

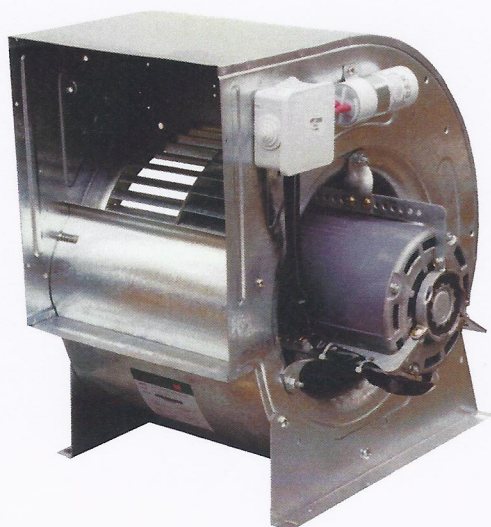


Dimensions

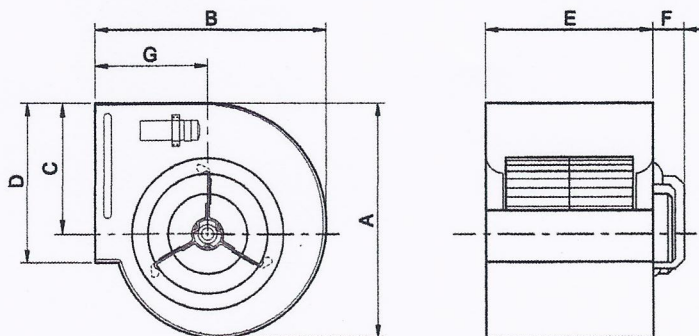


Model	A	B	C	D	E	F	G	Kg
KDD 7/7	328	312	192	228	259	46	152	9
KDD 8/8	364	345	216	256	287	46	164	11
KDD 9/7	387	380	216	262	232	85	185	14
KDD 9/7T	327	317	185	262	232	85	152	12.6
KDD 9/9	387	380	216	262	298	75	185	14.5
KDD 9/9T	327	317	185	262	298	76	152	13
KDD 10/8	443	425	249	289	265	96	203	18
KDD 10/10	443	425	249	289	331	76	203	20
KDD 12/9	521	491	294	341	309	98	230	23
KDD 12/12	521	491	294	341	395	88	230	25

All dimensions in mm

1-Speed



3-Speed



Technical Data

Model	CODE	Volt	Motor Prot.	Ph.	N° Pole	Power W	Hz	N. Amp	Max. Amp	Ins. Class	uF/V	RPM
KDD7/7 165W 4P-1 1SY	CE-AD0A703.00	220-240	IP21	1	4	165	50	1.25	1.25	F	7.5/450	1300
KDD8/8 165W 4P-1 1SY	CE-AD0A713.00	220-240	IP21	1	4	165	50	1.25	1.25	F	7.5/450	1300
KDD9/7 350W 4P-1 3SY	CE-AD0F723.01	220-240	IP21	1	4	350	50	2.4	3.6	F	12.5/450	1330/1150/1050
KDD9/7T 184W 6P-1 3SS	CE-AD1J729.00	220-240	IP21	1	6	184	50	1.90	1.90	F	10/450	900/822/770
KDD9/7T 350W 4P-1 3SA	CE-AD1F723.01	220-240	IP21	1	4	350	50	2.4	3.3	F	12.5/450	1330/1150/1050
KDD9/9 350W 4P-1 3SY	CE-AD0F733.00	220-240	IP21	1	4	350	50	2.4	3.6	F	12.5/450	1330/1150/1050
KDD9/9 550W 4P-1 3SY	CE-AD0G733.00	220-240	IP21	1	4	550	50	4.0	5.6	F	16/450	1300/1150/1050
KDD9/9T 350W 4P-1 3SA	CE-AD1F733.00	220-240	IP21	1	4	350	50	2.4	3.3	F	12.5/450	1330/1150/1050
KDD10/8 550W 4P-1 3SY	CE-AD0G743.01	220-240	IP21	1	4	550	50	4.0	5.1	F	12.5/450	1300/1250/1150
KDD10/10 550W 4P-1 3SY	CE-AD0G753.01	220-240	IP21	1	4	550	50	4.0	5.6	F	16.0/450	1300/1250/1150
KDD12/9 709W 6P-1 3SY	CE-AD0K763.00	220-240	IP21	1	6	709	50	4.62	5.3	F	12.5/450	900/715/510
KDD12/12 709W 6P-1 3SY	CE-AD0K773.00	220-240	IP21	1	6	709	50	4.62	6.0	F	12.5/450	900/715/510