


BIS RapidRail® Hammerfix

(G 30 50)


fixing to BIS RapidRail®

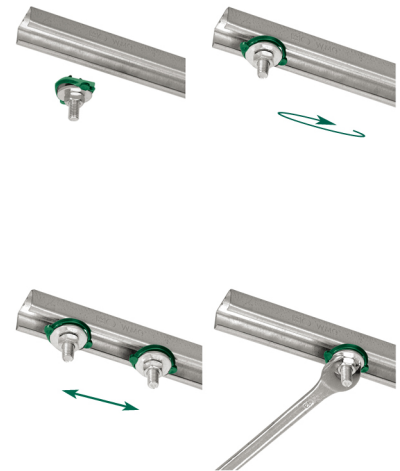

Features and Benefits

- slide nut with stud bolt, washer and BIS RapidRail® spring
- suitable for rail WM0, 1, 15, 2, 30, 35
- ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- zinc plated

Part No.	G	L	LU (mm)	s (mm)	SW1 (mm)	T _(max.) (Nm)	For Rail	F _{a,z} (N)	Pack 1	Pack 2
6523602	M6	20 mm	5	4.0	10	7.5	WM0 - 35	2,000	25	250
6523603	M6	30 mm	15	4.0	10	7.5	WM0 - 35	2,000	25	250
6523604	M6	40 mm	25	4.0	10	7.5	WM0 - 35	2,000	25	250
6523802	M8	25 mm	7	5.0	13	15.0	WM0 - 35	2,700	25	250
6523803	M8	30 mm	12	5.0	13	15.0	WM0 - 35	2,700	25	250
6523804	M8	40 mm	22	5.0	13	15.0	WM0 - 35	2,700	25	250
6523805	M8	50 mm	32	5.0	13	15.0	WM0 - 35	2,700	25	250
6523806	M8	60 mm	42	5.0	13	15.0	WM0 - 35	2,700	25	250
6523807	M8	70 mm	52	5.0	13	15.0	WM0 - 35	2,700	25	250
6523808	M8	80 mm	62	5.0	13	15.0	WM0 - 35	2,700	25	250
6523809	M8	90 mm	72	5.0	13	15.0	WM0 - 35	2,700	25	250
6523810	M8	100 mm	82	5.0	13	15.0	WM0 - 35	2,700	25	250
6523812	M8	120 mm	102	5.0	13	15.0	WM0 - 35	2,700	25	250
6523815	M8	150 mm	132	5.0	13	15.0	WM0 - 35	2,700	25	250
6523818	M8	180 mm	162	5.0	13	15.0	WM0 - 35	2,700	25	125
6523820	M8	200 mm	182	5.0	13	15.0	WM0 - 35	2,700	25	125
6523002	M10	25 mm	7	5.0	17	15.0	WM0 - 35	2,900	25	250
6523003	M10	30 mm	12	5.0	17	15.0	WM0 - 35	2,900	25	250
6523004	M10	40 mm	22	5.0	17	15.0	WM0 - 35	2,900	25	250
6523005	M10	50 mm	32	5.0	17	15.0	WM0 - 35	2,900	25	250
6523006	M10	60 mm	42	5.0	17	15.0	WM0 - 35	2,900	25	250
6523008	M10	80 mm	62	5.0	17	15.0	WM0 - 35	2,900	25	250
6523010	M10	100 mm	82	5.0	17	15.0	WM0 - 35	2,900	25	250
6523016	M10	160 mm	142	5.0	17	15.0	WM0 - 35	2,900	25	125

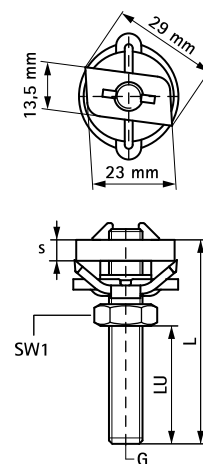

Complementary

- RapidRail® Fixing Rail
- BIS RapidRail® Cantilever Arm (BUP1000)