



Revision: 2

Date: June 2020

Supersedes all previous issues

Cube Invisi II

4.5/3 litre Dual Flush Toilet Suite with
Cube Wall Faced Box Rim Vitreous China Pan
and Invisi II Cistern for Inwall, Under Counter,
Induct or Inceiling applications





The **Cube Invisi II** toilet suite is suitable for inwall, under counter, induct, and in ceiling applications. The suite features smooth sides and concealed plumbing fittings which allow for varying setouts. The pan connection system includes the patented Caroma Uni-Orbital® connector and adjustable flush pipe for increased installation flexibility. The Caroma Uni-Orbital® connector extends to any position in a 25mm radius, unlike traditional connectors that only move backwards and forwards. The setout range is from 60mm – 170mm with a recommended setout of 90mm. The adjustable flush pipe is a new feature for the Invisi II system. If the pan inlet hole is higher than the flush pipe due to floor tiling height variations, the flush pipe can be raised by up to 25mm. Multiple button options are available to suit domestic and commercial applications. Concealed cistern and plumbing deliver space savings, easy cleaning and matched performance.

Pan: **Cube** 4.5 litre full flush box rim pan.

Traps: Universal trap for S or P-trap installations.

Cisterns: **Invisi II** cistern – suitable for inwall, under counter, induct and in ceiling applications. *For push button and access plate (supplied separately) options see chapter 6.15.1 CISTERNS of the Caroma Technical Manual.*

Fixing: The pan can be fixed to the floor by either bedding into mortar or using the D82 Concealed Fixing Bracket.

The cistern is simply mounted into position by clipping onto the two quick clip mounting brackets which are secured with screws to the studwork or induct brickwork. Cistern brackets and flush pipe supplied.


Seats: The **Cube** soft close toilet seat is provided as standard with the Cube suite. See chapter 5.01 SEATS of the Caroma Technical Manual for further details.

Colours: White only.

Installation: The installation of the toilet suite shall be in accordance with the normal minimum drainline grade requirements in AS/NZS 3500.2.

Dimensions: All dimensions are in millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

Cube Invisi II Wall Faced Suite Inwall/Under Counter Installations




Cube Invisi II 4.5/3 litre Wall Faced Toilet Suite with Back Inlet Pan, Internal Overflow Cistern and Cube Soft Close Seat:

Code No.

Inwall/Under Counter/ Induct/Inceiling	711100
Button options: see 6.15.1	

Inwall Installation

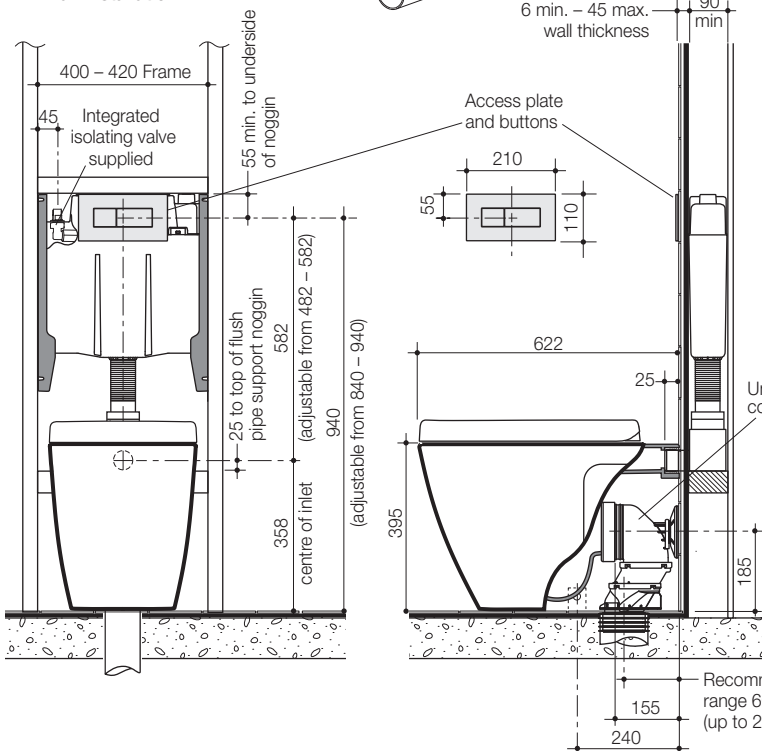

Under Counter Installation

(optional under counter flush pipe 237222 is required)

